

MODEL	Ø LINE mm	TYPE	WIDTH mm	WEIGHT kg	BOLTS N° x Ø mm
GRIP 10	8-10-12	SINGLE	34	0.40	2 x Ø6
		DOUBLE	67	0.80	4 x Ø6
		TRIPLE	101	1.20	6 x Ø6



GRIP 12	10-12-14	SINGLE	34	0.40	2 x Ø8
		DOUBLE	67	0.80	4 x Ø8
		TRIPLE	101	1.20	6 x Ø8



GRIP 14	12-14-16	SINGLE	34	0.40	2 x Ø8
---------	----------	--------	----	------	--------




The new "V-Grip" Stopper is designed to provide high holding power with no line slippage while allowing the line be released under maximum load without the use of a winch. The line can also be tailed through the stopper without opening the cam mechanism. The stopper's holding strength is increased by providing a longer and "V" shaped cam mechanism that increases the bearing surface on the line. This design also reduces line cover damage and the crushing of composite lines such as Kevlar, Vectran and Spectra. The stopper is also excellent for standard Polyester braids. The inner structure is made of 316 stainless steel, making it strong enough for the most demanding conditions. A compact size (only 6,6 cm in height) makes the stopper easy to install anywhere on the boat. The same model is made in 3 different versions for lines from 8 to 16 mm.

V-GRIP STOPPER ROLLER

This solution has been especially designed for the new ANTAL stopper and allows "in" and "out" manoeuvres to be guided away from the stopper with the most direct and efficient lead. In particular, the roller allows for the same winch to be used for many manoeuvres.

MATERIALS: Mekton sheaves, cover in hard black anodized aluminum.

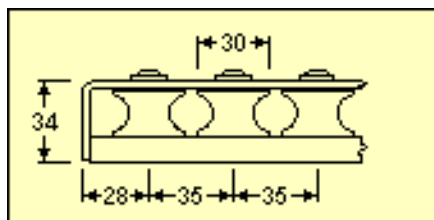

MODEL	SHEAVES N°	LENGTH mm	WEIGHT kg	BOLTS N° x Ø mm
522.032	2	89	0.14	2 x Ø6
523.032	3	124	0.19	3 x Ø6
524.032	4	160	0.24	4 x Ø6
525.032	5	193	0.30	5 x Ø6
526.032	6	228	0.35	6 x Ø6



MODEL	VERSION
513 / E	ENGLISH
513 / F	FRENCH
513 / I	ITALIAN

A set of 54 stickers is provided for an easy indication of manoeuvres; colors: red, green and black.