


Carbo Ratchamatic®

Supplied By:
American Rigging Supply, Inc.
www.americanriggingsupply.com



Melges 24 Worlds, James Spithill, McKee Brothers and Friends — Joy Dunnigan Photo

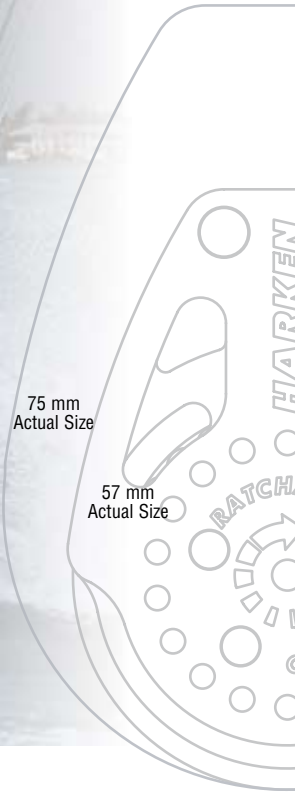

Use with 2631
for a powerful
8:1 purchase



2629
2685



2630
2686



2632
2687



2634

Part No.	Description	Sheave Ø		Length		Weight		Max line Ø		Shackle pin Ø		Safe working load		Breaking strength		Holding power w/180° wrap 50 lb (23 kg)
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	
57 mm																
2629	Triple/150 Cam-Matic®‡	2 1/4	57	4 1/16	103	14.9	421	3/8	10	1/4	6	1500	680	3750	1700	10:1
2630	Triple/150 Cam-Matic®/becket‡	2 1/4	57	4 15/16	125	15.2	431	3/8	10	1/4	6	1800	816	4500	2041	10:1
2632	Triple/150 Cam-Matic®/40 mm block/becket‡	2 1/4	57	6 1/8	156	18.3	520	3/8	10	1/4	6	1800	816	4500	2041	10:1
2634	Double	2 1/4	57	4 9/16	116	7.2	204	3/8	10	3/16	5	750	340	1875	851	10:1
75 mm																
2685	Triple/150 Cam-Matic®‡	2 5/16	75	6 3/16	137	31.0	879	7/16	12	5/16	8	1500	680	3750	1700	15:1
2686	Triple/150 Cam-Matic®/becket‡	2 5/16	75	6 1/2	165	31.6	896	7/16	12	5/16	8	1800	816	4500	2041	15:1
2687	Triple/150 Cam-Matic®/57 mm block/becket‡	2 5/16	75	6 1/2	165	34.7	984	7/16	12	5/16	8	1800	816	4500	2041	15:1

‡Safe working loads and breaking strengths for blocks based on cam strengths