

American Rigging Supply, Inc.

Hull LOA:	Max. Monohull	12m (40')
	Max. Multihull	9m (30')


Sail Area:	Max. Monohull	38m ² (409ft ²)
	Max. Multihull	30m ² (323ft ²)

Mast details (If known):

Spar Manufacturer	
Mast Type	
Profile No.	

Mainsail details:

Luff Length (P)	
Foot Length (E)	
Qty. Full Length Battens	



Feet required for cars;

RC264xx

For luff groove openings greater than 9mm (3/8").


Feet not supplied with cars.

Feet sold in pairs.

Fasteners included.

See website www.ronstan.com for most compatibility tables.

RC20111	Qty	Pairs
RC20112	Qty	Pairs
RC20113	Qty	Pairs
RC20114	Qty	Pairs
RC20115	Qty	Pairs
RC20116	Qty	Pairs
RC20117	Qty	Pairs
RC20118	Qty	Pairs



Feet supplied with cars;


RC261xx

RC262xx

RC263xx

For luff groove openings of approximately 4.5mm (3/16").

See website www.ronstan.com for most compatibility tables.



Feet supplied with cars;



RC265xx

For luff groove openings of approximately 8mm (5/16").

See website www.ronstan.com for most compatibility tables.


Ballslide™ Series 6

See www.ronstan.com website for car and feet selection table

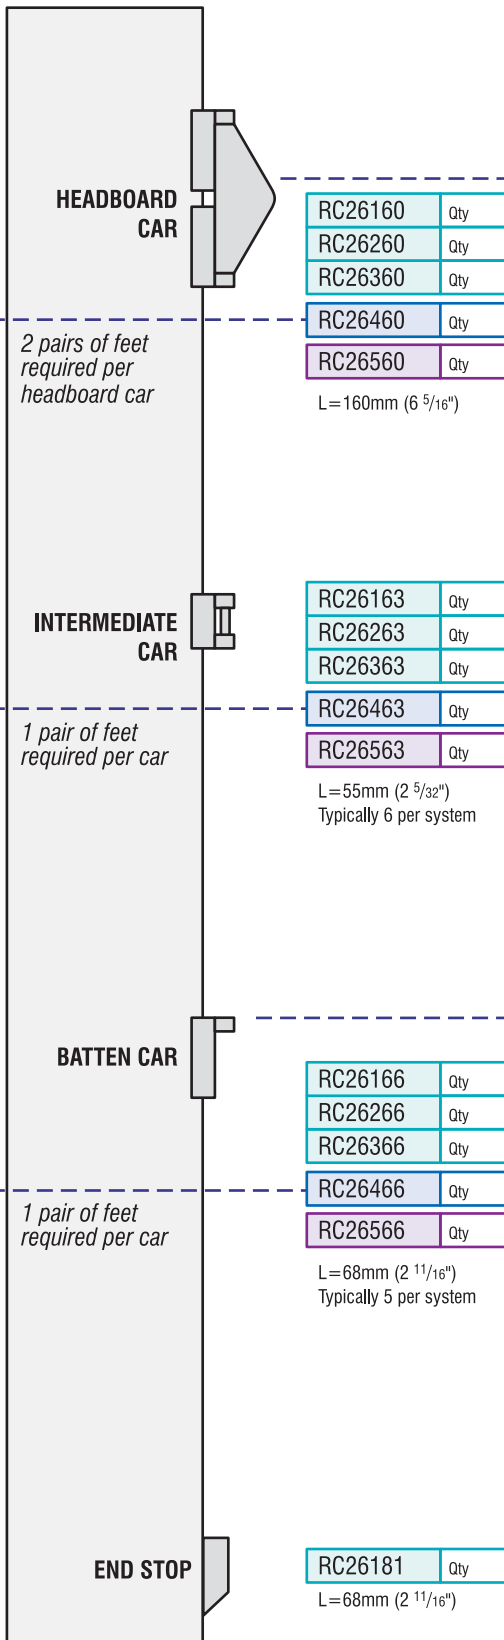

RC00010 Qty

HEADBOARD PLATES
(Pair)



RC00151 Qty

RC00141 Qty

RC001R1 Qty

RC00110 Qty

BATTEN RECEPTACLE LINKS

