

FEATURES

- ▶ Low profile and light weight, T-track is a simple, reliable system for adjustable sheet leads and spinnaker pole systems.
- ▶ Stainless steel slides have low friction liners and spring-loaded plunger pins for fast, positive positioning.
- ▶ Stand-up blocks on slide provide optimum alignment and low profile lead. The modular RC72539 slide accepts Series 40 and 50 single blocks.
- ▶ Jib leads for 25mm (1") T-track are typically used on boats up to 8 metres (26 feet).
- ▶ Track not suitable for curving.


MATERIALS

- ▶ Anodised aluminium alloy track.
- ▶ Grade 316 stainless steel slide bodies.
- ▶ U.V. stabilised Acetal sheaves.
- ▶ Nylon slide liners.

▶ **TRACK FASTENINGS** – 5mm (3/16") countersunk fasteners at 100mm (3 15/16") centres ▶ **STOP HOLES** – 50mm (1 31/32") centres

PRODUCT No.	DESCRIPTION	LENGTH		M.W.L.		B.L.		WEIGHT	
		mm	(in.)	kg	(lb)	kg	(lb)	g	(oz)
RC00470	Slide liners, plastic (pair)	97	(3 16/16)	-	-	-	-	10	(0.4)
RC7250-INS	Track bolt insulator	-	-	-	-	-	-	3	(0.1)
RC72501	Slide, loop top	92	(3 5/8)	500	(1100)	1000	(2200)	70	(2.5)
RC72502	Slide, loop top, plunger stop	92	(3 5/8)	500	(1100)	1000	(2200)	100	(3.5)
RC72503	Slide, loop top, plunger stop	92	(3 5/8)	650	(1430)	1300	(2870)	125	(4.4)
RC72532	Slide, Series 40 Ball Bearing stand-up block, suits 10mm (3/8") rope, plunger stop	92	(3 5/8)	350	(770)	800	(1760)	165	(5.8)
RC72533	Slide, Series 40 All Purpose stand-up block, suits 10mm (3/8") rope, plunger stop	92	(3 5/8)	400	(880)	800	(1760)	166	(5.9)
RC72534	Slide, Series 50 Ball Bearing stand-up block, suits 12mm (1/2") rope, plunger stop	92	(3 5/8)	500	(1100)	1000	(2200)	213	(7.5)
RC72535	Slide, Series 50 All Purpose stand-up block, suits 12mm (1/2") rope, plunger stop	92	(3 5/8)	750	(1650)	1000	(2200)	215	(7.6)
RC72543	Slide, spinnaker pole ring, plunger stop	92	(3 5/8)	-	-	-	-	145	(5.1)
RC72580	Track end, plastic	25	(1)	-	-	-	-	5	(0.2)
Track – Supplied with RC7250-INS inserts									
RC7250-1.0*	Track, black	1000	(3'3")	-	-	-	-	385	(13.6)
RC7250-1.5*	Track, black	1500	(4'11")	-	-	-	-	575	(20.3)
RC7250-2.0*	Track, black	2000	(6'7")	-	-	-	-	770	(27.2)
RC7250-3.0*	Track, black	3000	(9'10")	-	-	-	-	1150	(40.6)
RC7250-6.0*	Track, black	6000	(19'8")	-	-	-	-	2300	(81.1)

* Silver track available - Order as RCxxxxxS

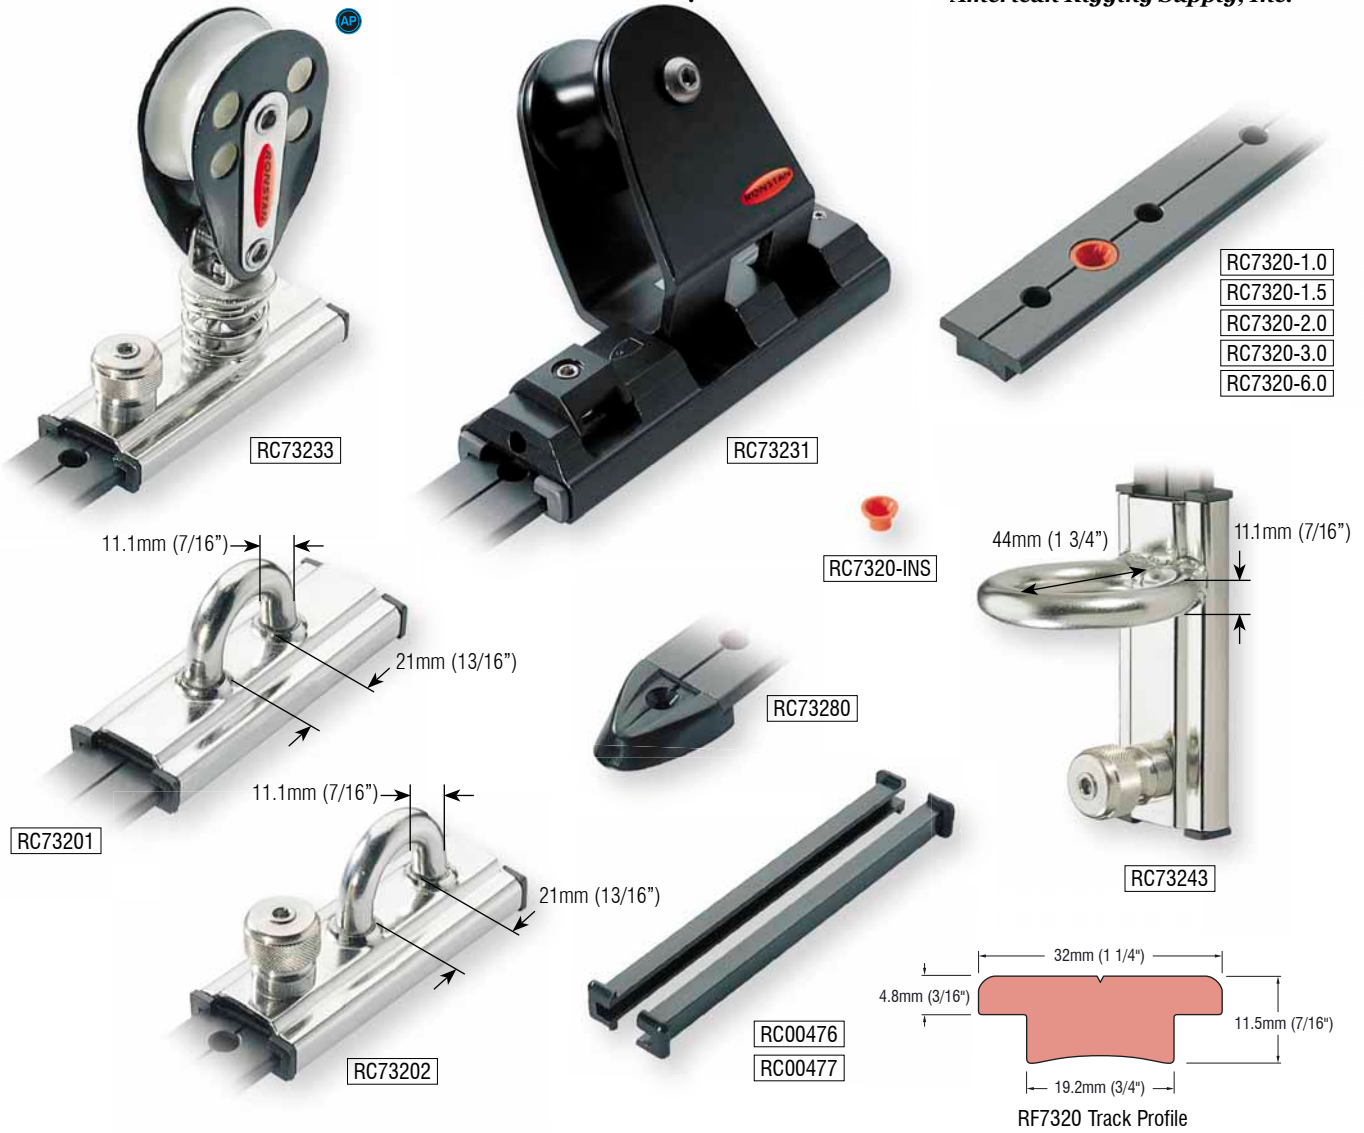

- RC7320-1.0
- RC7320-1.5
- RC7320-2.0
- RC7320-3.0
- RC7320-6.0

FEATURES

- ▶ RC73232 jib sheet car has a spring hinge for alignment of stirrup with sheet load.
- ▶ Jib sheet leads suit boats to 12m (40').
- ▶ RC73231 genoa car can accommodate two sheets for easy headsail changes, and has a plunger stop that can be locked in the "up" position.

MATERIALS

- ▶ Anodised aluminium alloy track.
- ▶ Grade 316 stainless steel slide bodies.
- ▶ U.V. stabilised Acetal sheaves.
- ▶ Nylon slide liners.

▶ **TRACK FASTENINGS** – 6mm (1/4") countersunk fasteners at 100mm (3 15/16") centres

▶ **STOP HOLES** – 50mm (1 31/32") centres

PRODUCT No.	DESCRIPTION	LENGTH		M.W.L.		B.L.		WEIGHT	
		mm	(in.)	kg	(lb)	kg	(lb)	g	(oz)
RC00476	Slide liners (pair), plastic, suits RC73201, RC73202, RC73233	107	(4 7/32)	-	-	-	-	-	-
RC00477	Slide liners (pair), Molybdenum Disulphide impregnated plastic, suits RC73231	152	(6)	-	-	-	-	11	(0.4)
RC7320-INS	Track bolt insulator	-	-	-	-	-	-	3	(0.1)
RC73201	Slide, loop top	102	(4)	1000	(2200)	2000	(4410)	185	(6.5)
RC73202	Slide, loop top, plunger stop	102	(4)	1000	(2200)	2000	(4410)	240	(8.5)
RC73231	Genoa car, suits up to twin 16mm (5/8") sheets, lock up/down plunger stop	146	(5 3/4)	1500	(3310)	3000	(6610)	480	(17.0)
RC73233	Slide, Series 60 AP block, suits 12mm (1/2") rope, plunger stop	102	(4)	1000	(2200)	2000	(4410)	440	(15.5)
RC73243	Slide, spinnaker pole ring, plunger stop	102	(4)	-	-	-	-	315	(11.1)
RC73280	Track end, plastic	32	(1 1/4)	-	-	-	-	35	(1.2)
Track – Supplied with RC7320-INS Nylon inserts									
RC7320-1.0*	Track, black	1000	(3'3")	-	-	-	-	670	(23.6)
RC7320-1.5*	Track, black	1500	(4'11")	-	-	-	-	1000	(35.3)
RC7320-2.0*	Track, black	2000	(6'7")	-	-	-	-	1330	(46.9)
RC7320-3.0*	Track, black	3000	(9'10")	-	-	-	-	2000	(70.5)
RC7320-6.0*	Track, black	6000	(19'8")	-	-	-	-	4000	(141.1)

* Silver track available - Order as RCxxxxxS