

★ CLUTCHES V-CAM814

Three models for 8-10 mm, 10-12 mm and 12-14 mm lines; available in single, double, triple and quadruple.

V-CAM814 has a box-structure in UV-resistant resin with s.steel reinforcements, aluminum base, V-Cam and aligning bushing in Aisi 316.

It can be completely dismantled for simple maintenance and repairing.

Line retrieval can be achieved with the lever closed.


The new mechanism guarantees easy opening even under heavy load.

The new V-Cam is larger, reduces the line cover damage and offers higher holding strength.



It is possible to replace the base to change the size of the line.

3 bases for 8-10, 10-12 and 12-14 mm are available.

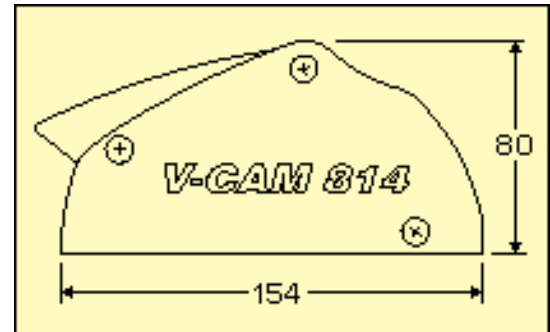

	MODEL	TYPE	WIDTH mm	WEIGHT kg	BOLTS N° x Ø mm
8 - 10 mm LINE	509.111	SINGLE	36	0.40	2 x Ø6
	509.121	DOUBLE	65	0.80	4 x Ø6
	509.131	TRIPLE	94	1.20	6 x Ø6
	509.141	QUADRUPLE	123	1.60	8 x Ø6
10 - 12 mm LINE	509.112	SINGLE	36	0.40	2 x Ø8
	509.122	DOUBLE	65	0.80	4 x Ø8
	509.132	TRIPLE	94	1.20	6 x Ø8
	509.142	QUADRUPLE	123	1.60	8 x Ø8
12 - 14 mm LINE	509.113	SINGLE	36	0.40	2 x Ø8
	509.123	DOUBLE	65	0.80	4 x Ø8
	509.133	TRIPLE	94	1.20	6 x Ø8
	509.143	QUADRUPLE	123	1.60	8 x Ø8

