

Click here to contact American Rigging Supply, Inc.

Toe Rail Folding Cleat

The toe rail folding cleat makes a perfect movable, mid-ship cleat for spring lines, etc. This cleat is mountable on all aluminum toe rails. The rail is protected by a silicon rubber pad for rattle free installation.

The cleat folds out of the way when not in use, the husky 3/8" dia. cleat assures strength. The complete unit is T-316 stainless. Fits most symmetric and asymmetric aluminum toe rails. Safe Working Load = 2000 lbs. Patent #DES.401,842





Toe Rail Folding Cleat

Cat. No. 48-510

1 1/4" Track Mounted Folding Cleat

Our husky 3/8" dia. folding cleat is now available mounted on a sliding stainless steel car for 1 1/4" track. The folding cleat is 8" long and features a knurled screw pin for adjustment along the track. The track surface is protected with a teflon/fiber strip. The entire unit is made from T-316 stainless steel. Safe Working Load = 2000 lbs. Patent #DES.401,842

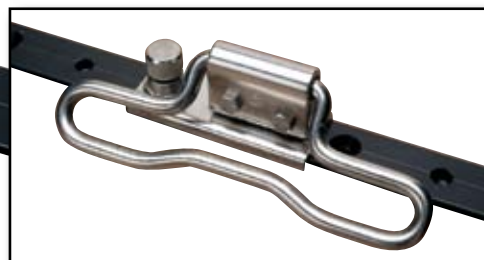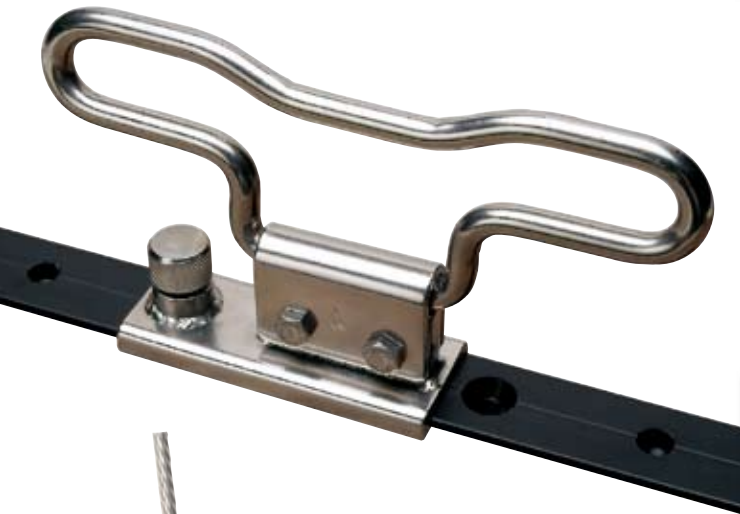

Track Mounted Folding Cleat

Cat. No. 48-511



Shroud Cleat

All stainless steel construction, compatible with your stainless steel rigging. Will not corrode. The JOHNSON SHROUD CLEAT is easily attached to 5/32" thru 3/8" dia. wire or rod. Ideal for flag, radar reflector and steaming shape halyards with an eye for attaching a snap shackle. Low profile, projects only 1/2" from shroud.

Shroud Cleat

Cat. No. 40-518

