

WHISKER POLES

Supplied By; American Rigging Supply, Inc.



Remember, for the ultimate Whisker Pole **Forespar®** offers the "Ultra Series" composite end fittings. These lightweight, strong end fittings are standard on 12-22 through 15-27 poles.

Whisker poles are used to "wing out" the jib when sailing downwind. Sailors who have experienced downwind sailing without one can appreciate the value of being able to stabilize the jib, enabling the sail to work more efficiently.

Forespar® manufactures the finest and most complete line of Whisker Poles in the world. All Whisker Poles are constructed of high strength anodized aluminum tubing, and both telescoping and fixed-length models are available. Two styles of telescoping poles are offered—the **Twist-Lock** style and the **Line-Control** style.

Where wind conditions tend to be gusty, the double latch option is recommended to avoid accidental detachment of the sheet from the pole end (**Twist-Lock** style poles).

The table below is meant to be used as a general guideline for selecting the proper whisker pole. Shown are pole recommendations relative to the following three variables: Boat Length, Sail Choice, and Wind Conditions. **Boats with relatively heavy displacements or bowsprits should use the next larger pole.**



LEGEND


Twist-Lock Poles (ADJ/HD)
Boats **16 - 25** Feet LOA

Line-Control Poles (LC)
Boats **26 - 55** Feet LOA




1

Un-cleat the Line.

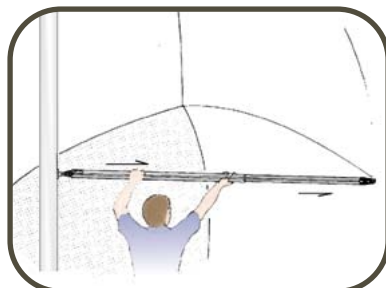

2

Pull Line out to extend the pole.

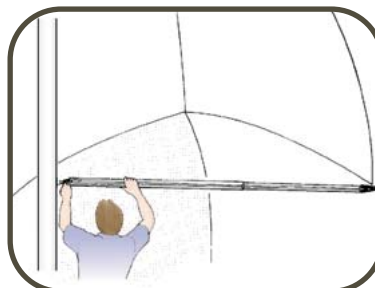

3

Re-cleat the Line.



WHISKER POLE SIZE RECOMMENDATIONS SEAMASTER SERIES

WORKING JIB

<u>Boat Length:</u>	<u>Light to Mod. Air</u>	<u>Mod. to Heavy Air</u>
Up to 16 ft.	ADJ 4'-8'	ADJ 6'-12'
Up to 22 ft.	ADJ 6'-12'	HD 6'-12'
Up to 25 ft.	HD 6'-12'	HD 6'-12'
Up to 28 ft.	LC 8'-14'	LC 8'-14'
Up to 33 ft.	LC 10'-18'	LC 10'-18'
Up to 35 ft.	LC 12'-22'	LC 12'-22'
Up to 46 ft.	LC 13'-24'	LC 13'-24'
Up to 55 ft.	LC 15'-27'	LC 15'-27'

GENOA

<u>Light to Mod. Air</u>	<u>Mod. to Heavy Air</u>
ADJ 6'-12'	HD 6'-12'
HD 6'-12'	LC 8'-14'
ADJ 7'-17' or LC 8'-14'	ADJ 7-17 or LB/LC 8'-14'
LC 8'-14'	LC 10'-18'
LC 10'-18'	LC 12'-22'
LC 12'-22'	LC 13'-24'
LC 13'-24'	LC 15'-27'
LC 15'-27'	Carbon Fiber Custom Poles

WHISKER POLES

Supplied By; American Rigging Supply, Inc.

LINE CONTROL™ 50/50 CARBON/ALUMINUM "COMBO" WHISKER POLES

These Line Control™ Whisker poles offer just the right blend of aluminum and carbon structures to provide the racing or cruising sailor weight and cost savings. They have the strength and weight savings of carbon on the inner tube and the abrasion resistance, durability and cost savings of aluminum on the outer tube. They also feature Forespar's exclusive "Ultra" end fittings (UTS socket inboard and UTR trigger outboard) for further weight reduction and ease of maintenance.



"PATENTED" LINE CONTROL™ WHISKER POLES

Line Control™ is a proven concept in telescoping whisker pole design. So unique, that full patent protection has been secured. Line Control™ is only available on Forespar® whisker poles. See the chart below for pole lengths and tube sizes. The system is simple, and makes the extension and retraction of poles quick and easy. And most amazing of all . . . the entire operation can be executed while being positioned at the mast. It is no longer necessary to go forward to adjust buttons of any kind — simply uncleat the line and extend or retract (never attempt to adjust while under load). It's quick and easy even with the largest poles. Topping lift attachment points are on all poles. Attachment to outer end is with end fittings jaw facing down.



Part No.	Model No.	End fittings		Recommended Mast Fittings	Collapsed Length / Weight	Max. Working Length	Tubing Diameters
		Inboard	Outboard				
408100	LC 8-14 EL-UXP	EL	EL	PE-3SC	95.75"/11 lbs.	167.88"	1-1/2" & 2"
401106	LC 10-18 EL-UXP	EL	UXP	PE-3SC, RC-125, FC-125	121.75"/17 lbs.	218.13"	2" & 2-1/2"
401107	LC 10-18 EL-UTR	EL	UTR	PE-3SC, RC-125, FC-125	121.75"/17 lbs.	218.13"	2" & 2-1/2"
402200	LC 12-22 UXP-UTR	UXP	UTR	RC-125, FC-125	148.50"/27 lbs.	265.25"	2-1/2" & 3"
402201	LC 12-22 UTS-UTR	UTS	UTR	T-125, AT-125	148.50"/28 lbs.	265.25"	2-1/2" & 3"
800802	LC 12-22 UTS-UTR-CF	UTS	UTR	T-125, AT-125	148.50"/19 lbs.	265.25"	2-1/2" & 3"
402203	LC 12-22 COMBO	UTS	UTR	T-125, AT-125	148.50"/24 lbs.	265.25"	2-1/2" & 3"
403200	LC 13-24 UXP-UXP	UXP	UXP	RC-125, FC-125	162.00"/38 lbs.	272.00"	3" & 3-1/2"
403202	LC 13-24 UTS-UTR	UTS	UTR	T-125-S	162.00"/39 lbs.	272.00"	3" & 3-1/2"
800800	LC 13-24 UTS-UTR-CF	UTS	UTR	T-125, AT-125	162.00"/24 lbs.	272.00"	3" & 3-1/2"
403203	LC 13-24 COMBO	UTS	UTR	T-125, AT-125	162.00"/34 lbs.	272.00"	3" & 3-1/2"
405200	LC 15-27 UTS-UXP	UTS	UXP	T-125-S	182.00"/58 lbs.	324.00"	3-1/2" & 4"
405201	LC 15-27 UTS-UTR	UTS	UTR	T-125-S	182.00"/58 lbs.	324.00"	3-1/2" & 4"
800801	LC 15-27 UTS-UTR-CF	UTS	UTR	T-125, AT-125	182.00"/32 lbs.	324.00"	3-1/2" & 4"
405203	LC 15-27 COMBO	UTS	UTR	T-125, AT-125	182.00"/42 lbs.	324.00"	3-1/2" & 4"

SEE REPLACEMENT PARTS PAGE

(CF Indicates Carbon Fiber poles)

WHISKER POLES

Supplied By: American Rigging Supply, Inc.

SMALL TELESCOPING POLES (TWIST LOCK)

Telescoping models can be adjusted to any desired length and securely locked in position with an effortless twist of the inner tube. All small poles include strong corrosion-free Lexan end fittings and a Mast Pad Eye with stainless steel screws.



Part No.	Model No.	Size/Weight
404000	ADJ 4-8	Telescopes from 53" to 93"/3 lbs. 1" outer diameter
404100	ADJ 4-8 DL	With latch fittings on both ends
406000	ADJ 6-12	Telescopes from 72" to 134"/3 lbs. 1- 1/4" outer diameter
406100	ADJ 6-12 DL	With latch fittings on both ends
404011	PE-1	Pad Eye Only
300026	ADJ 4-8	End kit
300027	ADJ 6-12	End kit

HEAVY DUTY TELESCOPING POLES (TWIST LOCK)

These telescoping whisker poles are heavy duty two section and three section aluminum spars which can be extended to lengths up to 17' and securely locked in position by an internal twist lock device. Poles feature self-latching **Ultra Series™** fittings on the inboard and outboard ends (**PE-3SF or PE-3SC Mast Pad Eyes recommended**). **SEE PAGE 8**



Part No.	Model No.	Size/Weight
406300	HD 6-12-DL	Two sections extending from 79" to 138", 1-7/8" outer tube diameter. With self-latching fittings on both ends/8 lbs.
407100	ADJ 7-17-DL	Three sections extending from 83" to 202", 2 in. outer tube diameter. With self-latching fittings on both ends/9 lbs.
304015 UEF-3	HD 6-12 DL	Special – inboard (big) end only
304018 UEF-5	HD 6-12 DL	Outboard end only (small)
304057 UEF-3	ADJ 7-17 DL	Inboard (big) end only
304018 UEF-5	ADJ 7-17-DL	Outboard end only (small).

LOCK REPAIR KITS*

To recondition any of our twist-lock telescoping poles, we offer lock repair kits. Complete instructions and all necessary parts are provided.



Part No.	Lock for:
400006	TAP's & ADJ 4-8's
400007	BHT's & TAP HD's
400008	ADJ 6-12
400009	HD 6-12
400010	ADJ 7-17 (Two-lock set)



***Individual sections and additional parts are available for repairing whisker poles.**

SEE REPLACEMENT PARTS PAGE