

pad-eye

PD

Supplied By American Rigging Supply, Inc.

strong points with integral fastening

sizes 6-16mm (1/4-5/8")
loads up to 12500kg (27500lbs)

High strength/low weight 17-4PH stainless steel 'U' bolt padeyes can be used without conventional fasteners.

PD features

- High quality **17-4 PH** stainless steel
- Eye load is transmitted directly to deck not through weld on plate
- Excellent strength/weight ratio
- Low profile** on deck
- Oval shape for closer fitting
- Can be fitted by one person
- Backing plate and fasteners provided
- Four fastener versions for cored decks




For your custom PD design
contact the Special Projects Team
spt@spinlock.co.uk

specifications

2 Fastener	4 Fastener	Max SWL*
PD/6	PD/6F	2150kg (4740lbs)
PD/8	PD/8F	4000kg (8820lbs)
PD/10	PD/10F	7600kg (16760lbs)
n/a	PD/12F	9600kg (21120lbs)
n/a	PD/16F	12500kg (27500lbs)
n/a	PD/18F	contact spt@spinlock.co.uk

* For angles of greater than 45° to vertical,
reduce SWL to 60%

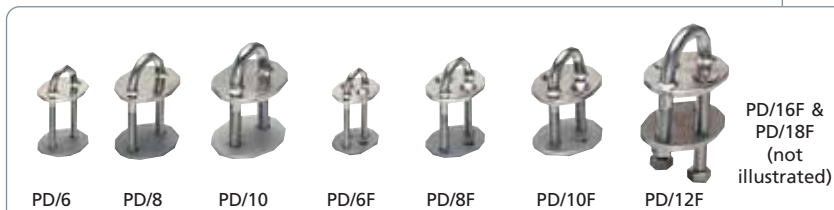

rope management