

powerclutch

Supplied By; American Rigging Supply, Inc.

XAS

effortless multi role clutch

lines 4-12mm (5/32-1/2")
loads up to 575kg (1270lbs)

Perfect for racing yachts up to 27'
and cruising yachts up to 35'.

XAS features

Excellent all round performance
High strength ergonomic handle with easy side access and soft feel
Optional handle colour inserts give positive identification (see accessories p26)
Identical footprint to original XA makes upgrading simple
Modular build: easy to upgrade & maintain
Interchangeable base optimises grip for small lines
Improved release

Line-friendly

Increased performance across the widest rope range
High performance, small diameter version for 4-8mm lines

Side-mountable

Easily installs on its side with fairing kit XAS-SMNT



TIP

Why a good line diameter range is essential

Lines will often be switched or replaced, or smaller stronger lines will be fitted. So, a bank of clutches must never be limited to a fixed diameter and type of line.



Original model XA



XA/1 units are still available if you wish to expand your existing XA installation with matching units.

mid load ropeholding

Supplied By; American Rigging Supply, Inc.

Small diameter lines XAS0408

Gives optimised clutching and holding power on small diameter lines 4-8mm (5/32-5/16"). Strongly recommended for sportsboat and other small boat high performance applications. (Check holding power/line diameter chart below).

(XAS0612 may be upgraded for small diameters by using base module XAS-BASE0408).

Continuous line

To solve the problem of loading a continuous furling line, these clutches are supplied as kits with open bullseyes to be assembled directly onto the line. XAS0612/1M, XAS0612/2M

Side mounting the XAS

Side mounting is usually the neatest solution for spars, side decks, and coamings and is unique to Spinlock.

To install a single XAS on its port or starboard side, simply use the fairing kit XAS-SMNT.



TIP

Use with T38 organisers on p16.


specifications

special purpose clutches

Model	Line Dia	Max SWL at max line diameter
XAS0408/1	4-8mm (5/32-5/16")	450kg (990lbs)
XAS0408/2	4-8mm (5/32-5/16")	450kg (990lbs)
XAS0408/3	4-8mm (5/32-5/16")	450kg (990lbs)



Rope size guide

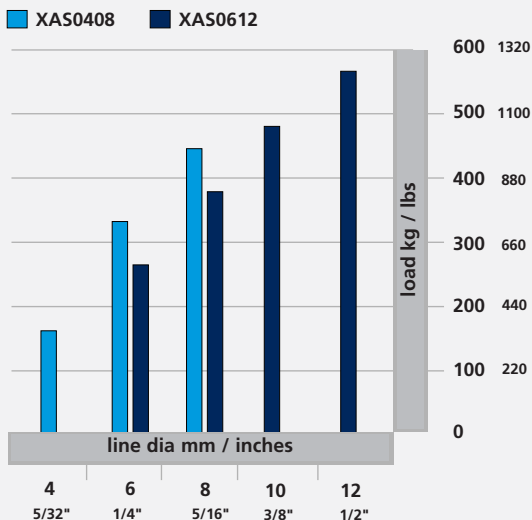

To increase holding power increase your line diameter (or sleeve the rope tail). Good quality line and larger diameters always give better results.

specifications

Model	Line Dia	Max SWL at max line diameter	Kit form for endless lines
XAS0612/1	6-12mm (1/4-1/2")	575kg (1270lbs)	XAS0612/1M
XAS0612/2	6-12mm (1/4-1/2")	575kg (1270lbs)	XAS0612/2M
XAS0612/3	6-12mm (1/4-1/2")	575kg (1270lbs)	-

mid load ropeholding