

J-Lock Shackles

Supplied By: American Rigging Supply, Inc.

Easily spliced onto Genoa sheets, outhauls and halyards, the new low-profile Tylaska J-locks fit through most Genoa blocks for fast sheet changes. Unique patented double-locking plunger locks in two directions for the ultimate in flog-free operation.

SHACKLE TYPE	J8	J12	J20	J30
WEIGHT oz (gm)	1.9 (54)	2.9 (82)	5.6 (159)	14.6 (371)
WORK LOAD lb (kg)	4,000 (1,818)	6,000 (2,727)	10,000 (4,545)	15,000 (6,818)
BREAKING STRENGTH lb (kg)	8,000 (3,636)	12,000 (5,455)	20,000 (9,091)	30,000 (13,636)
LINE SIZE	8-10mm	10-12mm	12-16mm	14-20mm



UNLOCKED POSITION
J-Lock opens only when the knob is rotated so that its notch is aligned with the body's tab.



LOCKED POSITION
The notch in the knob is turned away from the tab on the body and seated on the keyway shown below.




Keyway prevents knob from rotating.


"Knob" type pull pin

Structural protrusion for added strength


J-Locks Shown Actual Size
 Patent 6,539,885

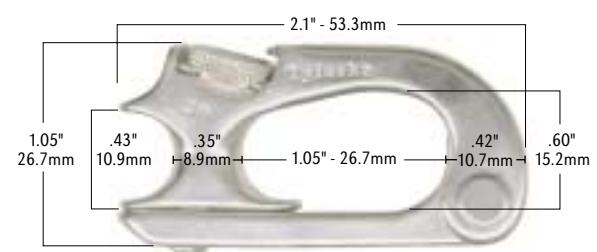


J8

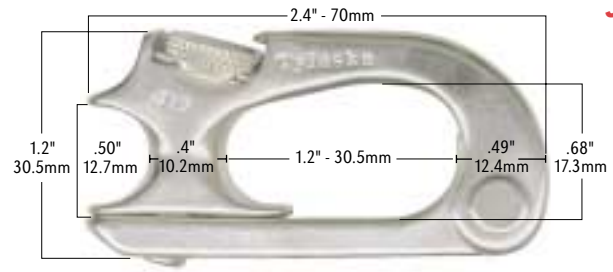

J12

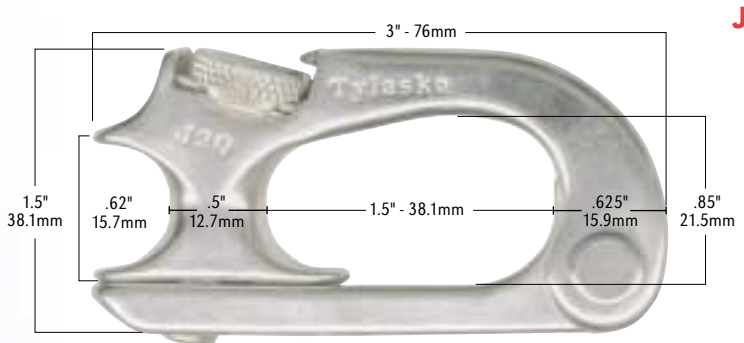

J20

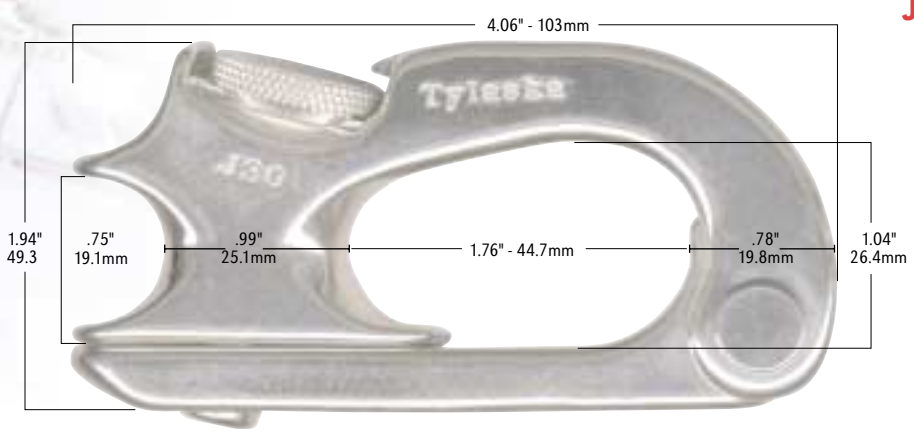

J30