

BABYSTAY ADJUSTERS «patented»

Supplied By; American Rigging Supply, Inc.

For fitting a jib, setting up a genoa or a solent jib... Both for safety and performance reasons, fitting a removable inner forestay is strongly recommended when there is a roller furling system.

Wichard offers a whole range of babystay adjusters.

The table below will allow you to determine the best suitable product for your boat.



1 With wheel (delivered with shackle part # 1206)

Part #	Length pin to pin closed / open mm	Toggle length x width mm	Ø pin mm	Handling Kg	W.L. Kg	B.L. Kg	Ø stud mm	For wire Ø mm	Weight Kg
5546	250 / 310	15 x 20	12	1200	2800	4240	12	5/6/7	1.090

2 With handle

2	5554	310 / 450	10 x 10	8	800	960	1920	8	4/5	0.802
3	5556	450 / 510	15 x 20	12	1200	2800	4240	12	5/6/7	1.268
4	5566	370 / 540	15 x 20	12	1200	2800	4240	12	5/6/7	1.390

5 With ratchet

	5585	360 / 520	17 x 22	12	2500	3200	4800	14	8/7/9	1.848
	5587	360 / 520	17 x 22	14	2500	3200	5360	14	8/7/9	1.856
	5588	415 / 615	18 x 25	16	3300	3200	7200	16	9/10	2.862



Selection chart of babystay adjusters per size of boat

Length in m		6 to 7.60	7.60 to 9.00	9.00 to 10.00	10.00 to 10.70	10.70 to 11.15	11.50 to 12.00	12.00 to 13.60	13.60 to 14.50
Length in ft		20 to 25	25 to 30	30 to 33	33 to 35	35 to 38	38 to 40	40 to 45	45 to 48
Head stay	Removable stay								
5 mm	4 mm	5554	5554						
6 mm	5 mm	5554	5546/5556/5566	5546/5556/5566					
7 mm	6 mm	5546/5556	5556/5566	5556/5566	5566				
8 mm	7 mm	5546/5556	5566/5587/5585	5587/5585	5587/5585	5587/5585	5587/5585	5587/5585	5587/5585
9 mm	8 mm		5587/5585	5587/5585	5587/5585	5587/5585	5587/5585	5587/5585	5587/5585
10 mm	9 mm		5587/5585	5587/5585	5587/5585	5587/5585	5587/5588	5588	5588
12 mm	10 mm			5588	5588	5588	5588	5588	5588


These indications are not contractual, as each boat is different, we recommend to check with a professional.

Supplied By: American Rigging Supply, Inc.

Accessories for babystay attachment.

Wichard offers a comprehensive range of fixing points for babystay attachment. Double pad eye allows a single attachment point for both the babystay pelican adjuster and the jib tack point, fits all sizes of adjusters.

Part #	Description	Weight kg
1	9150 Babystay tang , to be fitted to the mast	0.306
2	6564 Double folding pad eye dia 6 (see page 32)	0.126
	6565 Double folding pad eye dia 8 (see page 32)	0.252
	6566 Double folding pad eye dia 10 (see page 32)	0.494
3	9204 Eye strap, used as a backing plate for double pad eye part #6564 and 6565 (see page 32)	0.038
	9205 Eye strap, used as a backing plate for double pad eye part #6566 (see page 32)	0.075
4	6435 Threaded eye hook for tensioning. Breaking load 1000 kg (small yachts). Length: 450 mm - M10	0.254

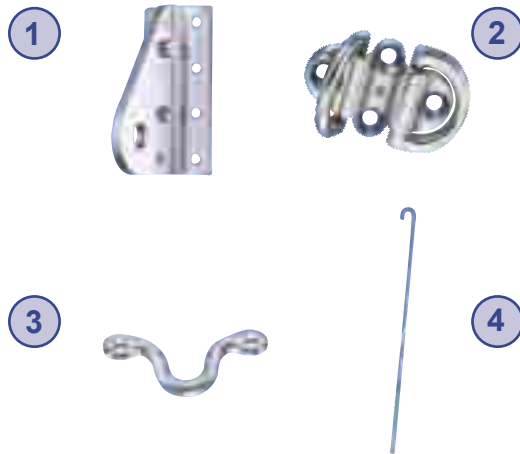

Backstay adjusters «patented»

Backstay adjusters allow you to optimize rigging and sails performance. Our models with handles are also comfortable to operate and allow greater onboard access. For small units, the wheel model offers an outstanding value for money.

5 With wheel

Part #	Length pin to pin Closed/open mm	Toggle Length x Width mm	Ø pin mm	Handling mm	W.L. Kg	B.L. Kg	Ø Stud mm	For wire Ø mm	Weight Kg
5526	350 / 520	15 x 20	12	1200	2800	4240	6/5/7	12	1.128

6 With handle

Part #	Length pin to pin Closed/open mm	Toggle Length x Width mm	Ø pin mm	Handling mm	W.L. Kg	B.L. Kg	Ø Stud mm	For wire Ø mm	Weight Kg
5536	350 / 520	15 x 20	12	1200	2800	4240	12	6/5/07	1.306

7 With ratchet

Part #	Length pin to pin Closed/open mm	Toggle Length x Width mm	Ø pin mm	Handling mm	W.L. Kg	B.L. Kg	Ø Stud mm	For wire Ø mm	Weight Kg
5565	440 / 660	17 x 22	12	2500	3200	4800	14	8/7/09	2.052
5567	440 / 660	17 x 22	14	2500	4400	5360	14	8/7/09	2.088
5568	505 / 755	18 x 25	16	3300	5600	7200	16	9/10	3.264



W.L.: Working load / B.L.: Breaking load