

Supplied By: American Rigging Supply, Inc.

The outstanding technical characteristics of Wichard swivels mean they are the preferred option whenever the safety of crew or equipment is at stake. And this applies not only in the navy or on yachts, but also in diverse sectors such as the entertainment industry, the defence sector and the lifting and handling sector. When you are risking your life, you have the right to be demanding !

1 With clevis pin


| Part # | Length mm | A mm | B mm | C mm | Ø D mm | W.L. Kg | B.L. Kg | Weight Kg |
|--------|-----------|-------------------------|------|------|--------|---------|---------|-----------|
| 2464 | 70 | 14 | 21 | 11 | 7 | 1600 | 2240 | 0.087 |
| 82464 | 70 | same with ball bearings | | | | 1600 | 2240 | 0.087 |
| 2465 | 105 | 19 | 31 | 18 | 11 | 3200 | 5200 | 0.280 |
| 82465 | 105 | same with ball bearings | | | | 3200 | 5200 | 0.280 |

2 Pin with allen head

| Part # | Length mm | A mm | B mm | C mm | Ø D mm | W.L. Kg | B.L. Kg | Weight Kg |
|--------|-----------|------|------|------|--------|---------|---------|-----------|
| 2364 | 70 | 14 | 21 | 11 | 8 | 1440 | 2240 | 0.084 |
| 2365 | 105 | 19 | 31 | 18 | 10 | 3200 | 4400 | 0.265 |

3 Large bail

| Part # | Length mm | A mm | B mm | C mm | Ø D mm | W.L. Kg | B.L. Kg | Weight Kg |
|--------|-----------|-------------------------|------|------|--------|---------|---------|-----------|
| 2467 | 80 | 26 | 14 | | | 1600 | 2400 | 0.096 |
| 82467 | 80 | same with ball bearings | | | | 1600 | 2400 | 0.096 |
| 2468 | 115 | 35 | 19 | | | 3200 | 5200 | 0.263 |
| 82468 | 115 | same with ball bearings | | | | 3200 | 5200 | 0.268 |
| 2466 | 125 | 41 | 21 | | | 5200 | 7200 | 0.368 |

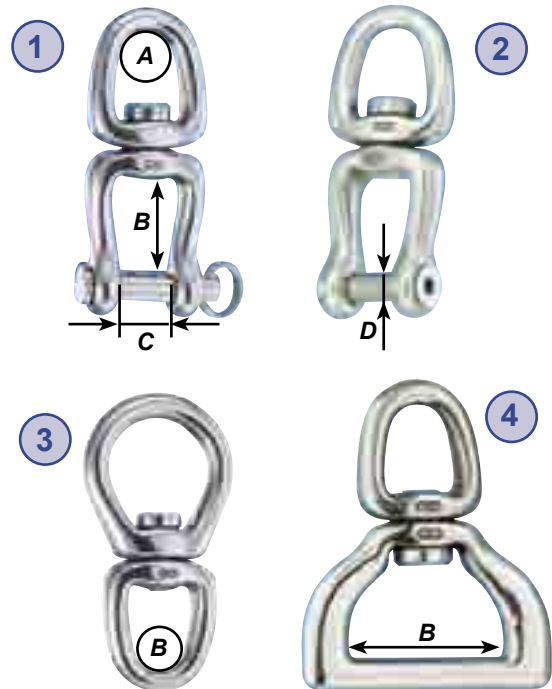

Mooring swivels

Our new mooring swivels are made from a grade of stainless steel that is specially made so that it can be immersed in water permanently. Consequently, they have a strength well-suited to this application and excellent resistance to corrosion. You can fit out your mooring lines with shackles # 1206, 1207, 1246, 1247 ou 1248 (see page 43)



8 Moorings swivel

| Part # | Length mm | A mm | B mm | W.L. Kg | B.L. Kg | Weight kg |
|--------|-----------|------|------|---------|---------|-----------|
| 2442 | 130 | 38 | 35 | 1760 | 3200 | 0.290 |
| 2443 | 150 | 44 | 41 | 2960 | 4400 | 0.415 |

4 Webbing swivel

| Part # | Length mm | A mm | B mm | C mm | Ø D mm | W.L. Kg | B.L. Kg | Weight Kg |
|--------|-----------|------|------|------|--------|---------|---------|-----------|
| 2367 | 60 | 11 | 30 | | | 960 | 1200 | 0.580 |
| 2368 | 80 | 14 | 40 | | | 1600 | 2560 | 0.110 |

5 Fork - Fork (SS cambered Plate)

| Part # | Length mm | A mm | B mm | C mm | Ø D mm | W.L. Kg | B.L. Kg | Weight Kg |
|--------|-----------|------|------|------|--------|---------|---------|-----------|
| 2461 * | 45 | 9 | 10 | 10 | 5 | 480 | 800 | 0.026 |
| 2462 * | 60 | 15 | 13 | 12 | 6 | 720 | 1120 | 0.052 |

Parts # 2461 and 2462 are not "HR".

6 Self-locking

| Part # | Length mm | A mm | B mm | C mm | Ø D mm | W.L. Kg | B.L. Kg | Weight Kg |
|--------|-----------|------|------|------|--------|---------|---------|-----------|
| 2463 | 80 | 20 | 17 | 11 | 8 | 1440 | 2240 | 0.102 |
| 2469 | 120 | 30 | 27 | 18 | 10 | 2000 | 4000 | 0.322 |

7 Allen head pin

| Part # | Length mm | A mm | B mm | C mm | Ø D mm | W.L. Kg | B.L. Kg | Weight Kg |
|--------|-----------|------|------|------|--------|---------|---------|-----------|
| 2363 | 80 | 20 | 17 | 11 | 8 | 1440 | 2240 | 0.099 |
| 2369 | 120 | 31 | 27 | 18 | 10 | 2000 | 4000 | 0.312 |