


Swageless Compression Terminals

The latest development for compression fittings results in a termination at least as strong as the rated breaking load of the wire rope. The unique star shaped "Crown Ring" positions and holds the wire strands in place, eliminating the requirement for awkward wire end bending. The shallow angled cone establishes direct mechanical grip on the core and all outer strands. Stainless steel grade EN10088 1.4404 (316) is used on all parts with the exception of the crown ring which is manufactured from Aluminium Bronze. No sealant or packing is required.

Compression Forks

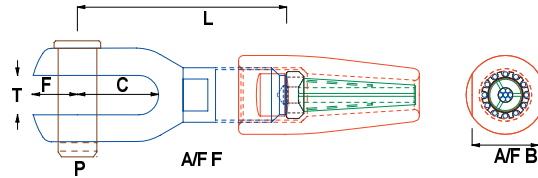


Metric Wire - 3mm to 26mm

PRODUCT CODE	W	P	F	C	T	L	A/F B	WEIGHT
CTF03	3mm	6.3mm	7mm	13mm	6.3mm	30mm	9.5mm	29g
CTF04	4mm	8mm	9mm	16mm	8mm	40mm	11mm	60g
CTF05	5mm	9.5mm	11mm	19mm	10mm	47mm	14mm	103g
CTF06	6mm	11mm	12mm	22mm	11mm	50mm	19mm	159g
CTF07	7mm	12.7mm	15mm	25mm	12.7mm	58mm	20mm	239g
CTF08DS	8mm	12.7mm	15mm	25mm	12.7mm	63mm	22mm	323g
CTF08	8mm	14.3mm	16.5mm	28mm	14mm	70mm	22mm	395g
CTF08US	8mm	16mm	18mm	32mm	16mm	72mm	26mm	490g
CTF10	10mm	16mm	18mm	32mm	16mm	78mm	26mm	542g
CTF12	12mm	19mm	23mm	38mm	19mm	93mm	32mm	918g
CTF14	14mm	22.2mm	26mm	45mm	22.2mm	106mm	36mm	1464g
CTF16	16mm	25.4mm	30.5mm	50mm	25.4mm	126mm	40mm	2125g
CTF19	19mm	28mm	33mm	58mm	28.6mm	133mm	44mm	2616g
CTF22	22mm	32mm	39mm	64mm	32mm	146mm	52mm	3890g
CTF26	26mm	35mm	43.5mm	70mm	35mm	167mm	64mm	6393g

The part codes in the tables are for 1X19 wire rope construction. Different Cones and Crown Rings are used for 7 strand and compact strand. Add suffix -7 or -C for these assemblies. If in doubt please ask.

Compression Toggles

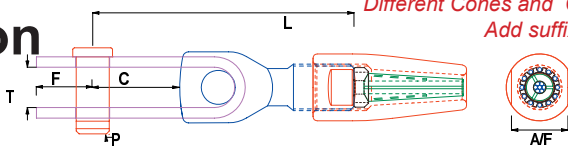

PRODUCT CODE	W	P	F	C	T	L	A/F B	WEIGHT
CTT03	3mm	6.3mm	8mm	16mm	8mm	45mm	9.5mm	37g
CTT04	4mm	8mm	12mm	20mm	10mm	57mm	11mm	71g
CTT05	5mm	9.5mm	13mm	25mm	11mm	71mm	14mm	125g
CTT06	6mm	11mm	17mm	26mm	14mm	80mm	19mm	258g
CTT07	7mm	12.7mm	19mm	29mm	16mm	90mm	20mm	327g
CTT08DS	8mm	12.7mm	19mm	29mm	16mm	93mm	22mm	397g
CTT08	8mm	14.3mm	25mm	39mm	18mm	112mm	22mm	672g
CTT08US	8mm	16mm	25mm	40mm	19mm	116mm	26mm	700g
CTT10	10mm	16mm	25mm	40mm	19mm	119mm	26mm	800g
CTT12	12mm	19mm	25mm	54mm	22mm	157mm	32mm	1242g
CTT14	14mm	22.2mm	30mm	60mm	24mm	174mm	36mm	2302g
CTT16	16mm	25.4mm	32mm	70mm	28mm	194mm	40mm	3037g
CTT19	19mm	28mm	38mm	80mm	30mm	215mm	44mm	4280g
CTT22	22mm	32mm	50mm	85mm	34mm	235mm	52mm	6518g
CTT26	26mm	35mm	50mm	105mm	38mm	296mm	64mm	9591g